


STENTFON Bi-Way System

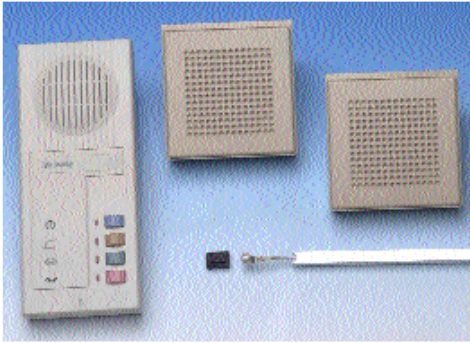

7026-65 Starter Kit

Consists of:

- Bi-Way Operator's Unit
- Microphone Kit
- Loudspeaker Kit
- #1119 Power Supply



7026-60 Operator's Unit

For desktop, flush or wall mounting


<i>Dimensions:</i>	3.7x2.6x8.8
<i>Weight:</i>	.08
<i>Supply Voltage:</i>	12 V DC
<i>Current Consumption:</i>	180/42 mA
<i>Output Power,</i>	
<i>Public Side:</i>	500 mW peak
<i>Operator's Unit:</i>	350 mW peak



7026-81 Flush Mount Speaker Kit

Optional loudspeakers for flush mount applications in desk or wall.

<i>Height/Diameter:</i>	2.3x6.3
<i>Weight:</i>	1.5
<i>Frequency Range:</i>	130-15000 Hz
<i>Power:</i>	6 W
<i>Impedance:</i>	20 ohm



7026-70 Microphone Kit

Electret microphone with 5m cable. Plastic microphone housing. Two aluminum lists with self adhesive tape.

<i>Dimensions:</i>	
<i>Microphone Housing:</i>	.07x0.4x0.5
<i>Aluminum Lists</i>	39.4x0.4x0.2
<i>Electret Microphone:</i>	Primo EM76
<i>Sensitivity (1 kHz/3V):</i>	0.7 mV, +/-3 dB/74 dB



7026-72 External Microphone

Optional microphone for connection to the operators unit to improve flexibility.



7026-92 Headset


Headset with microphone for connecting to Bi-Way operator's unit.



7026-72 Gooseneck Mic

Optional directional microphone for extreme noise conditions.


<i>Height:</i>	12.6x0.5
<i>Weight:</i>	0.3
<i>Frequency Range:</i>	100-10000 Hz
<i>Sensitivity:</i>	7.2 mV/Pa, +/-3 dB
<i>Impedance:</i>	1000 ohms, +/-40%

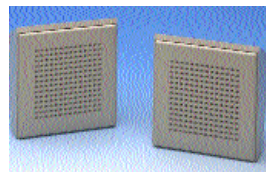

7026-80 Loudspeaker Kit

2 loudspeaker cabinets with self-adhesive tape.

<i>Dimensions:</i>	4.1x4.2x2.8
<i>Weight:</i>	.08
<i>Impedance:</i>	50 ohm
<i>Power Capacity:</i>	max. 2 W
<i>Resonant Frequency:</i>	250 Hz

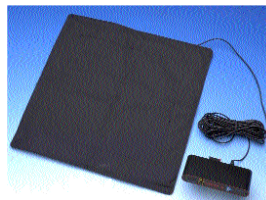

7026-82 Hearing Aid Kit

Hearing aid loop antenna and amplifier



1119 Power Supply

Low voltage DC power supply.

<i>Voltage:</i>	12 V DC
<i>Output:</i>	1.2A
<i>Input:</i>	117 V AC, 40 W
<i>AC Cord:</i>	N/A
<i>Size:</i>	4 1/2"x2 3/4"x2 1/4"
<i>Weight:</i>	11.2 oz