




Zenitel USA  
6119 Connecticut Ave.  
Kansas City, MO 64120  
800/654-3140  
Fax 816/231-7203  
www.zenitelusa.com

## 1032 Emergency Strobe & Indicator Light

### FUNCTIONAL DESCRIPTION

The 1032 is a combination strobe (1 million candlepower) and 7 watt fluorescent indicator light that is contained in a weather tight and vandal resistant polycarbonate dome. The unit provides leads capable of activating the strobe when connected to a contact closure and works with emergency intercom units for both the constant on and emergency strobe functions.

The 1032 strobe mounts to a 2 gang surface/bell box with optional strobe bracket #1033. The strobe is ideal when used with a Stento intercom substation #62925 or #9625. Requires #9689 Strobe Control Relay Board. The dome is available in standard blue or optional red, green, yellow and clear.

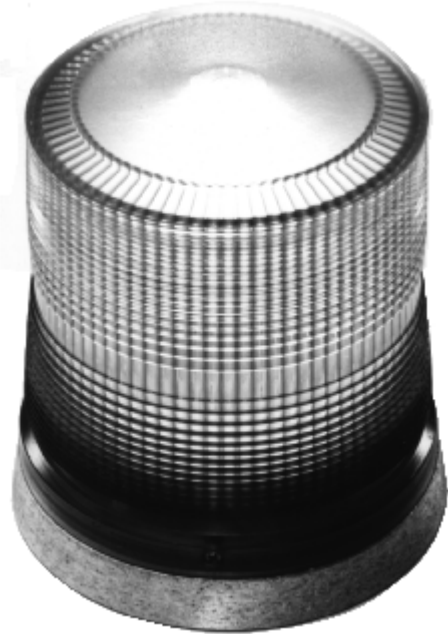

### TECHNICAL SPECIFICATIONS

Dimensions	6.125" H x 5.53" W
Weight	2.5 lbs.
Input Voltage	90vac-132vac
Input Current (fluorescent)	.1 amps (typ)
Input Current Avg. (strobe)	.2 amps (typ)
Input Current peak (strobe)	4 amps @ 1 MS
Candlepower (strobe)	1.0 million
Candlepower (fluorescent)	6 candela
Operating Temperature	-30°C to + 60°C (22°F to 140°F)
Operating Humidity	0 to 95%
Output Voltage	18 volts max
Output Current	5 ma max.
Flashrate (strobe)	= 60 sfpm