

Wall Substation

Model 7044

Features

- Three call buttons for instant contact to freely programmable extension numbers or features.
- Rugged front plate of anodised brushed aluminium.
- Private / Open switch.
- Red “microphone live” lamp.
- Built-In 63 Ohm / 1W loudspeaker.
- Adjustable loudspeaker volume.
- Excellent sound quality.

Description

This substation is designed for both flush and surface mounting on the wall. Back-boxes are available for this purpose.

The three call buttons can be freely programmed to call extensions and connect to features in the Stentofon exchange.

A Modular Jack plug on the station end gives quick and easy connection to the station’s circuit board.

2-pair twisted telephone cable is required between the exchange and the station.

The station is equipped with an electret microphone - which automatically adjusts to the audio level - and a 63 Ohm / 1 W loudspeaker. The loudspeaker volume is easily adjustable with a screwdriver using the potentiometer located on the outside of the front plate.




Specifications


Order Number:	7044
Operation Voltage:	Powered from exchange
Cable Requirements:	2 pair twisted cable
Temperature Range:	0° C to +40° C +32° F to +104° F
Humidity Range:	10% - 85% RH (non condensing)
Dimensions:	125 mm W x 280 mm H x 53 mm D 4,9" x 10,9" x 2,1"
Finish:	Anodised brushed aluminium
Loudspeaker Output:	1 W (63 Ohm)
Loudspeaker Impedance:	63 Ohm
Frequency Range:	300 - 5000 Hz
Loudspeaker Sound Pressure Level:	75 dB (0,5 mm cable x 100 m, 2,5 V _{RMC} on ab-wire, 1 KHz)
Microphone Output Voltage:	100/300 mV
Microphone Preamp. Output Impedance:	600 Ohm
Connector Type:	Modular Jack
Indicator:	LED (red)

Wall Substation

Installation

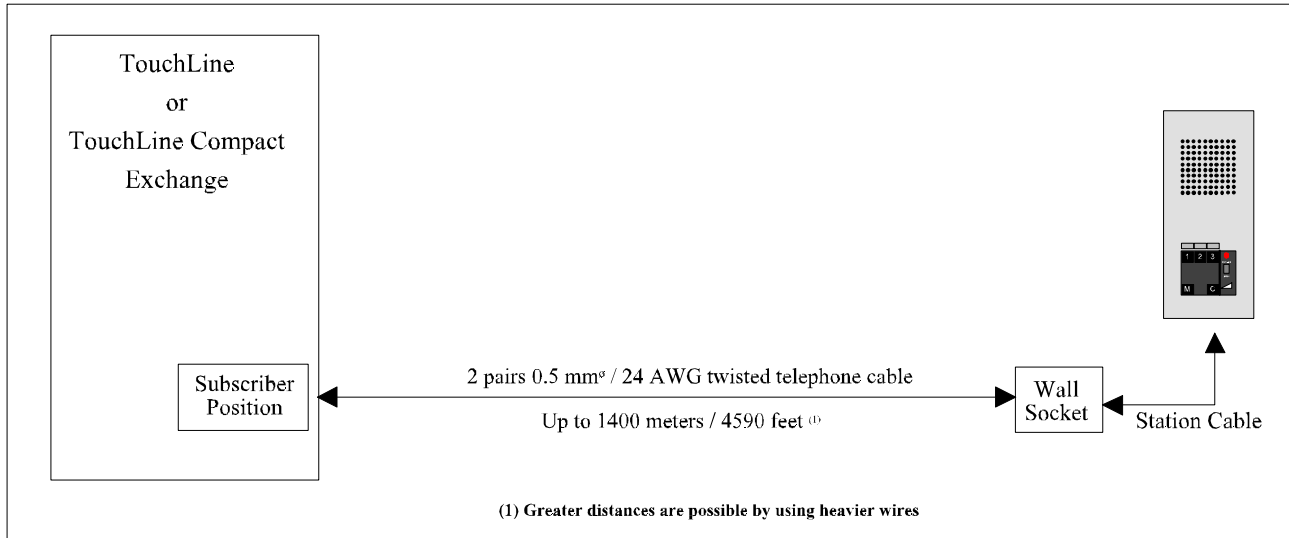

Wiring

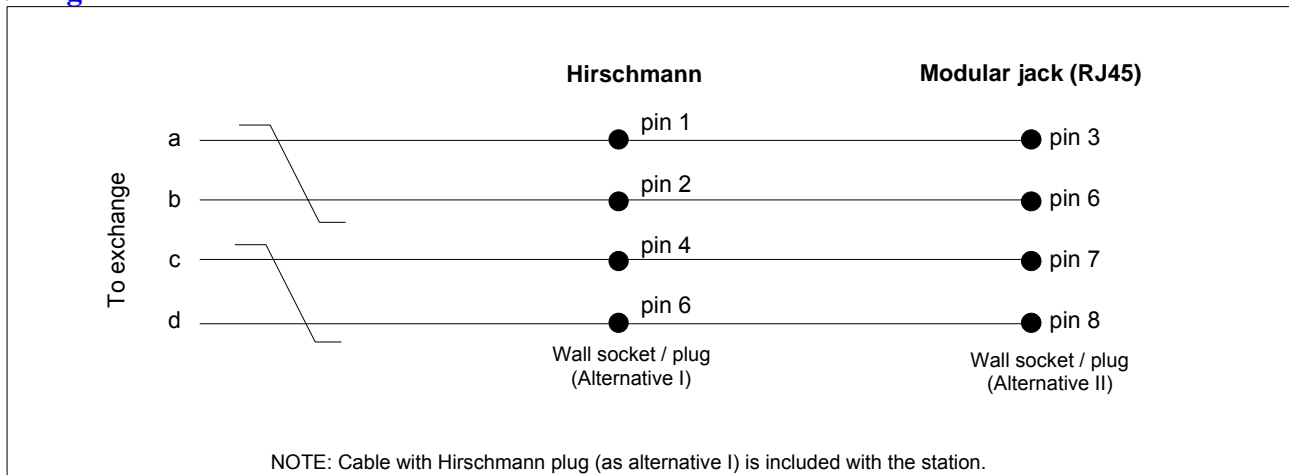

Order Number	Description	Ship Weight metric/imperial
7044	Wall Substation	600 gr. / 1 lb. 5 oz
Accessories		
6030	Surface Mount Back Box	1 kg / 2 lb. 3 oz
6020	Flush Mount Back Box for Pamex Wall Stations	600 gr. / 1 lb. 5 oz
98520	Station Cord - 8 pin modular jack. Both ends 9ft.	
98525	Station Cord - 8 pin modular jack. Both ends 18 in.	
MOS-80	Receptacle - 8 pin modular. Surface mount on inside wall box	
MOW-80	Receptacle - 8 pin modular flush mount, on single gang plastic plate.	