


STENTOFON 9490 Intercom Module Power Supply IMPS

Features

- Plug-in power supply for the 9400 intercom module
- Provides 5, 12 and 24 volts DC for the module
- Power supplied are din rail types
- Supplies are current limited
- Input Voltage
 - AC Inputs of 85-264 VAC at 47 to 440HZ
 - DC Inputs of 120 to 270 VDC
- Unit has mounting for up to two 9680 amplifiers
- LED status indicators for each voltage

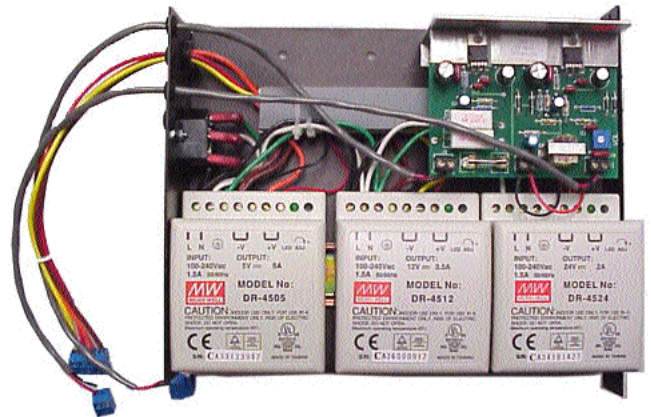

94901 Shown

Functional Description

The 9490 power supply provides all standard voltages required by the 9400 intercom module. The power are standard din rail type and will work off a wide range on AC or DC inputs. The unit has overload protection and three LEDs power status. In addition, the unit has space for mounting up to two of the 9680 amplifiers for use with 45 ohm substations. These are ordered as a separate item.

Technical Specifications

Order Number:	#9490X
Output Voltages:	5 VDC at 2.5 amps 12 VDC at 3.5 amps 24 VDC at 2.0 amps
Dimensions:	2.65 x 10.0 x 7.8 inches
Weight:	3.5 lbs.
Indicators:	Green status LED for each voltage
Mounting:	Slide into card rack

Power Supply Versions:

94900 - No 9480 Amplifier

94901 - One 9480 Amplifier

94902 - Two 9480 Amplifiers

Note: 9480 used with 9600 type sub stations